

This website uses third-party cookies in order to obtain statistical data about browsing. If you continue browsing, it is understood that you accept the use of such cookies. For further information or to find how to change your cookies settings, please consult our [cookies policy](#)


MANTER

COATED 80 P-1000 CC62
3030066107

Edit: 12

Approval date: 29-09-2014

Belongs to the collection:
NEW Industrial & Synthetic Collection

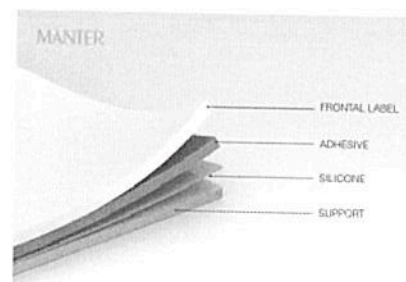

Front Label	
Reference	COATED 80
General characteristics	White coated, calendered, woodfree paper.
Grammage (gr/m ²) ISO 536	80
Thickness (µm) ISO 534	65
Gloss 75° (%) TAPPI T480	>64
Dry opacity (%) ISO 2471	88

Adhesive	
Reference	P-1000
General characteristics	General purpose permanent acrylic water based adhesive. Good adhesion to a wide variety of substrates, including non-polar surfaces. Good behaviour at low temperatures. The research centre ISEGA has given the adhesive P-1000 approval according to the European requirements for direct contact with dry and moist, non-fatty foodstuffs and compliance with the FDA, 21 CFR Ch.I(April 1, 2013 edition) 175.105 for direct contact with dry foodstuffs or they must be separated from the foodstuffs by a functional barrier.
Tack (N) glass FTM-9	>9
Cohesion (h) 1kg FTM-8	>2
Labelling temperature (°C)	>0°C
Usage temperature (°C)	-10°C/+65°C

Support	
Reference	CC62
General description	Supercalendered glassine paper, cream.
Grammage (gr/m ²) ISO 536	60
Thickness (µm) ISO 534	50
Transparency (%) ISO2469	48
Tensile strength MD/CD (KN/m) ISO 1924	MD(KN/m) >5,2 - CD (KN/m) >2,1

Uses and applications

Multipurpose labels for industrial use

Shelf life

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH)

The technical specifications given are general in nature and based on our knowledge, for which reason the suitability of our products for the end use to which they are put cannot be guaranteed. It is the purchaser's responsibility to assess, test and ensure the suitability of each product for their end use through their own prior approval process; Manter cannot therefore be held responsible for unsuitable end use of its products. These technical product specifications supersede all previous editions. All information is subject to change without prior notice.