



## VACUUM METAL SILVER LUX SH-6020 PLUS CC62

3932729108

Edition: 8

Date of approval: 07/07/2015

## Belongs to the collections

- MANTER Wine & Spirit Label Collection
- THE ART OF LUXURY LABELLING

## Technical datasheet

## Front Label

Reference	VACUUM METAL SILVER LUX
General characteristics	Metallised silver paper with high vacuum aluminium particles with high gloss grade.
Grammage (gr/m <sup>2</sup> ) ISO 536	83
Thickness (µm) ISO 534	66
Tensile strength MD/CD (KN/m) ISO 1924	MD>4,0, CD>2,0


## Adhesive

Reference	SH-6020 PLUS
General characteristics	Water-based permanent acrylic adhesive. Good adhesion to wet surfaces at low temperatures. Especially designed for glass containers, with excellent resistance to immersion in water/ice. The research centre ISEGA has given the adhesive SH-6020 Plus approval according to the European requirements for indirect contact with foodstuffs and compliance with the rules of the Code of Federal Regulations, FDA, 21 CFR Ch.I(April 1, 2013 edition) 175.105. According to the FDA regulations the adhesive must be separated from the foodstuffs by a functional barrier.
Tack (N) glass FTM-9	>11
Cohesion (h) 1kg FTM-8	>2
Labelling temperature (°C)	>5°C
Usage temperature (°C)	-10°C / +75°C

## Support

Reference	CC62
General characteristics	Supercalendered glassine paper, cream.
Grammage (gr/m <sup>2</sup> ) ISO 536	58
Thickness (µm) ISO 534	51
Transparency (%) ISO2469	48
Tensile strength MD/CD (KN/m) ISO 1924	MD(KN/m) >5 - CD (KN/m) >2

MANTER

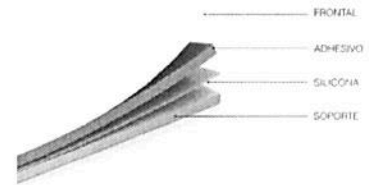

## Ice bucket



## Fridge



## Additional information

The test of resistance to immersion in water-ice is carried out by sticking a blank(unprinted) label on a standard glass bottle. Five days after the label is stuck on, it is submerged in an ice bucket containing icy water for a minimum period of 4 hours and its resistance to immersion is checked.

## Uses and applications

Specially designed for product labels of high added value bottled in glass (wine, licquors, champagne, oil, water, jar....). Labels with a luxury and metallic look.

## Shelf life

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH)

The technical specifications given are general in nature and based on our knowledge, for which reason the suitability of our products for the end use to which they are put cannot be guaranteed. It is the purchaser's responsibility to assess, test and ensure the suitability of each product for their end use through their own prior approval process; Arconvert S.A. cannot therefore be held responsible for unsuitable end use of its products. These technical product specifications supersede all previous editions. All information is subject to change without prior notice.