

This website uses third-party cookies in order to obtain statistical data about browsing. If you continue browsing, it is understood that you accept the use of such cookies. For further information or to find how to change your cookies settings, please consult our [cookies policy](#)

MANTER

UNCOATED WHITE SH-6020 PLUS CB80
3880229509

Edit: 11

Approval date: 29-09-2014

Belongs to the collection:
NEW Sommelier & Gourmet

Front Label


Reference	UNCOATED WHITE
General characteristics	Pure cellulose paper. Wet strength.
Grammage (gr/m2) ISO 536	90
Thickness (µm) ISO 534	104
Dry opacity (%) ISO 2471	90
Wet opacity (%) ISO 2471	84
Opacity variation (%)	6
Cobb (gr/m2)	26

Adhesive

Reference	SH-6020 PLUS
General characteristics	Water-based permanent acrylic adhesive. Good adhesion to wet surfaces at low temperatures. Especially designed for glass containers, with excellent resistance to immersion in water/ice. The research centre ISEGA has given the adhesive SH-6020 Plus approval according to the European requirements for indirect contact with foodstuffs and compliance with the rules of the Code of Federal Regulations, FDA, 21 CFR Ch.I(April 1, 2013 edition) 175.105. According to the FDA regulations the adhesive must be separated from the foodstuffs by a functional barrier.
Tack (N) glass FTM-9	>11
Cohesion (h) 1kg FTM-8	>2
Labelling temperature (°C)	>5°C
Usage temperature (°C)	-10°C / +75°C

Support

Reference	CB80
General description	Supercalendered glassine paper, white.
Grammage (gr/m2) ISO 536	78
Thickness (µm) ISO 534	67
Tensile strength MD/CD (KN/m) ISO 1924	MD(KN/m) >6,8 CD (KN/m) >3,0

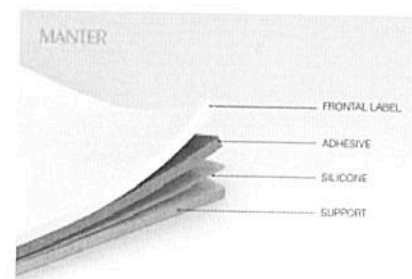

Additional information

Due to the high stiffness of this product, it is not recommended for labelling small diameter curved surfaces (bottle neck labels,...). We recommend the reels to be wound with the face side out. The test of resistance to immersion in water-ice is carried out by sticking a blank(unprinted) label on a standard glass bottle. Five days after the label is stuck on, it is submerged in an ice bucket containing icy water for a minimum period of 4 hours and its resistance to immersion is checked.

Uses and applications

Specially designed for product labels of high added value bottled in glass (wine, liquors, champagne, oil, water,...)

Shelf life

2 years, under storage conditions as defined by FINAT section 2.5 (20-25°C, 40-50% RH)

The technical specifications given are general in nature and based on our knowledge, for which reason the suitability of our products for the end-use to which they are put cannot be guaranteed. It is the purchaser's responsibility to assess, test and ensure the suitability of each product for their end use through their own prior approval process; Manter cannot therefore be held responsible for unsuitable end use of its products. These technical product specifications supersede all previous editions. All information is subject to change without prior notice.